

Dryer (DRY 2.1)



Powered by Enapter



Enapter's dryer is a hybrid temperature/pressure swing adsorption system that comprises of cartridges filled with a highly adsorbent material. The dryer is maintenance-free. During operation, one cartridge catches the humidity from the hydrogen gas stream of the electrolyser, while the other cartridge is heated and regenerated. The dryer is rack-mountable in a standard 19" cabinet.


Contact us: info@h2coresystems.com; +49 151 11 34 78 99



This is a design data sheet, changes to the technical parameters are protected.

Specifications

Dryer DRY 2.1

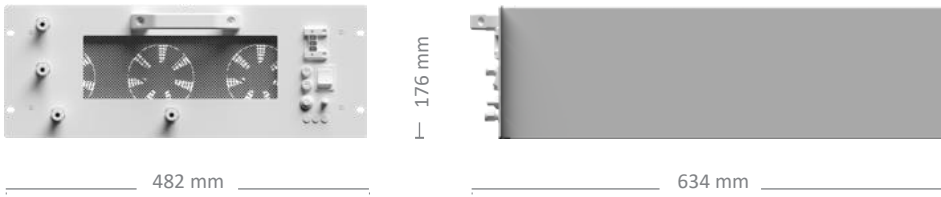

Hydrogen flow rate	2,500 NL/h
Input pressure	35 bar
Output pressure	Up to 35 bar
Min. input purity	>99.8%
Hydrogen output purity	99.999% in molar fraction
Average dewpoint and impurities	< -70°C, compliant with ISO14687 (H ₂ O < 5 ppm, O ₂ < 5 ppm)
Weight	23kg
Dimensions (W x D x H in mm)	482 × 634 × 176 mm
Space inside cabinet	4U
Operative power consumption	200 W
Stand-by power consumption	10 W
Power supply	AC 200-240 V, 50/60 Hz
Ambient operative temperature range	5 - 45°C
IP rating	IP 20
Maintenance	Maintenance-free
Control and monitoring	Fully automatic with Enapter's EMS

Contact us: info@h2coresystems.com; +49 151 11 34 78 99



This is a design data sheet, changes to the technical parameters are protected.